

LED RECESSED SENSOR LAMP

Product&Family Code:

079 027 0002


QUARTZ




WHITE



Technical Drawing



Photometric Diagram

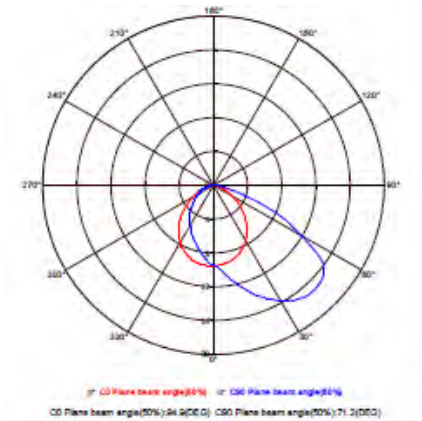

Technical Data	
Voltage (V)	110-265V
Product Wattage (W)	2
Equivalence with incandescent lamp	16
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	4200K
Materials	PC
Protection Class	II
Dimmable	No
EEL	A to A++
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	100
Luminous Efficacy (lm/W)	50
Rated Life (hrs) Ⓢ	30.000
IP Rating	20
Power Factor	>0.5
Beam Angle	100°
Starting Time	<0.2s
Number of ON-OFF cycling	x15.000

Applications

For indoor applications; corridor or on buildings



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- With MICROWAVE SENSOR
- Extremely Long Life.

